SPECIFICATIONS

MOEN®

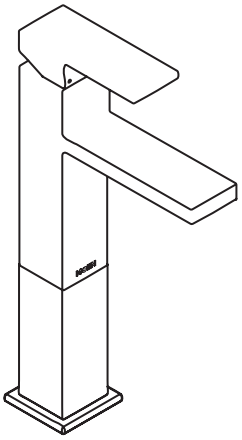

KYVOS™

Single-Handle Vessel Lavatory Faucet

MODELS: 6782 / 6782BL

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/4" MIN. DIA.

DESCRIPTION
- Metal construction with various finishes identified by suffix.
- Single-Handle Vessel Lavatory Faucet, has brass construction with zinc, polymer, and steel components.
- Flexible supllies with 3/8" compression fittings.

OPERATION
- Lever style handle.
- Temperature controlled by 100° arc of handle travel.
- Includes hot & cold temperature indicators.

FLOW
- Flow is limited to 1.2 gpm max (4.5 L/min) at 60 psi.

CARTRIDGE
- 1255™ Duralast™ cartridge for Single-Handle Faucets.

STANDARDS
- Third party certified to WaterSense,® ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein including NSF61/9 & 372.
- Compliant with California water efficiency regulations.
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act.
- ADA for lever handle.

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner.
- 10 year limited warranty when used in a multifamily installation.
- 5 years limited warranty when used in a commercial installation.

Visit www.moen.com/support for complete details and limitations.

WaterSense Meets EPA Criteria
Certified by IAPMO R&T

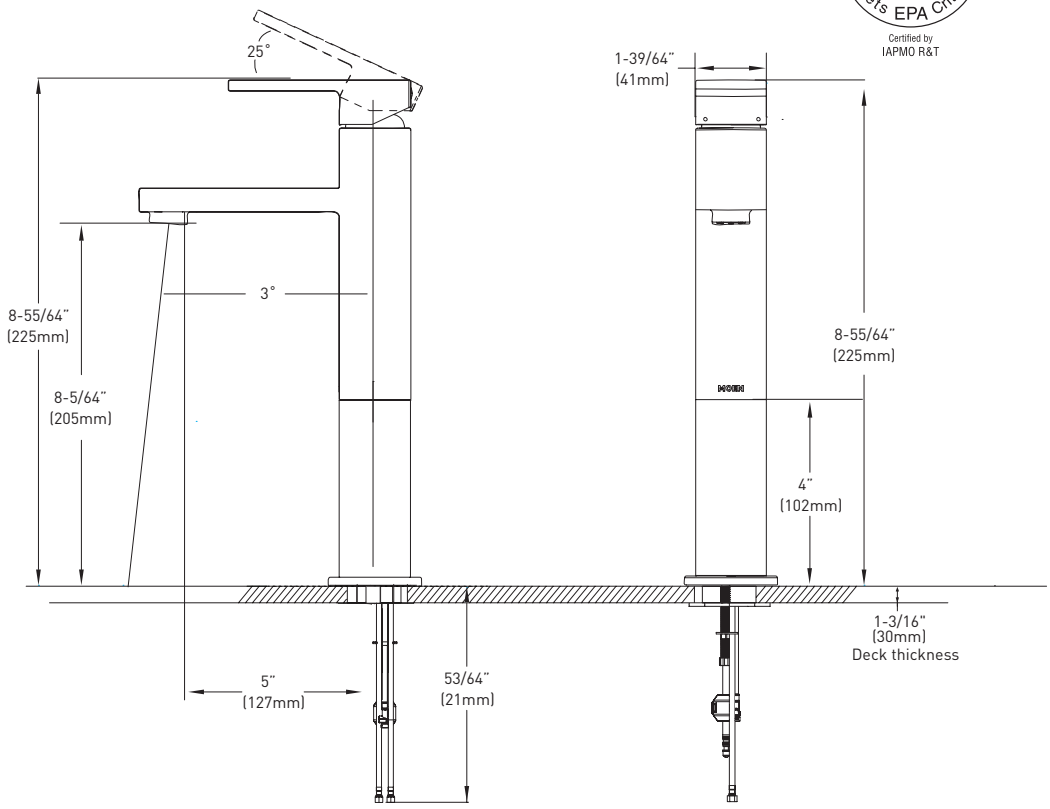

CRITICAL DIMENSIONS DO NOT SCALE

10/12/2022 SPC15653 3000054169
Replaces 0111